

SERIES 300 SINGLE HUNG WINDOW

TEST SIZE W x H	AAMA RATING	AIR INFILTRATION	DESIGN PRESSURE	WATER RESISTANCE	U-VALUE	SHGC	VT
39.5" x 63"	R-PG35	≤30 cfm/ft ²	35 psf	5.25 psf	0.24-0.48	0.19-0.63	0.37-0.65



TABLE OF CONTENT


- INTRODUCTION -P1
- SECTION DETAILS -P2
- REPLACEMENT FRAME -P3
- MULLION -P4-P5

FEATURES



- 2-5/8" FRAME DEPTH
- 7/8" INSULATED GLASS
- SINGLE STRENGTH GLASS
- MEETING RAIL LOCK
- TILT SASH WITH TILT LATCH
- CONTINUOUS LIFT HANDLE ON BOTTOM SASH
- SLOPED SILL
- CONSTANT FORCE COIL BALANCE
- DOUBLE-SEAL WEATHERSTRIPPING
- SEALED UPPER SASH
- INTEGRAL NAILING FIN

OPTIONAL SELECTIONS


- LOW-E COATING & ARGON FILLED IGU
- CUSTOM FINISH AND CUSTOM COLORS
- SPIRAL OR BLOCK & TACKLE BALANCE
- HALF SCREEN
- LIMIT STOPS
- INSTALLATION SCREWS
- GRIDS
- DUAL VENT LOCK
- OTHER OPTIONAL ACCESSORIES

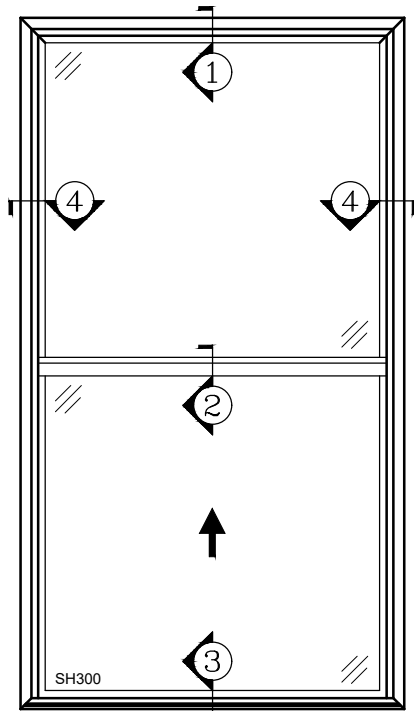


300 SINGLE HUNG

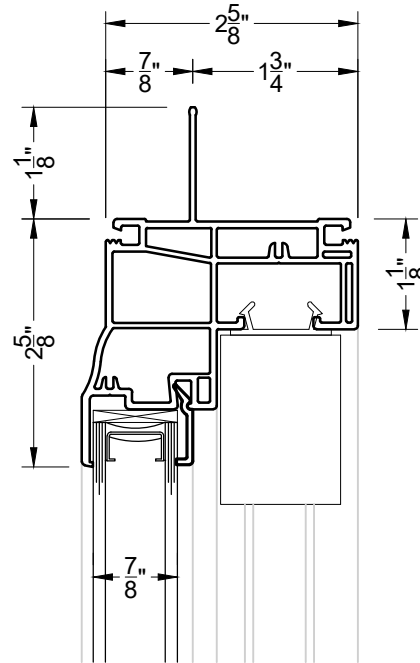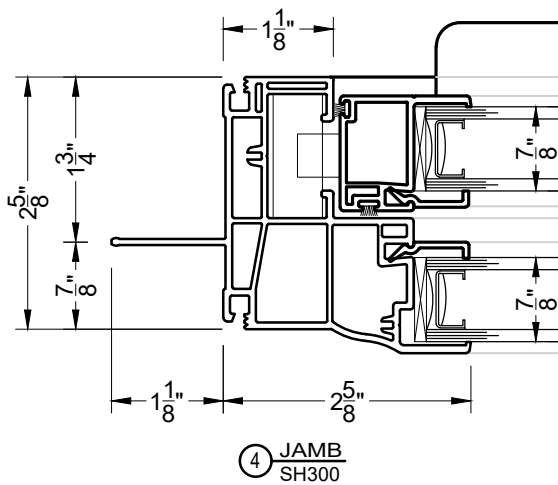


1 HEAD
SH300

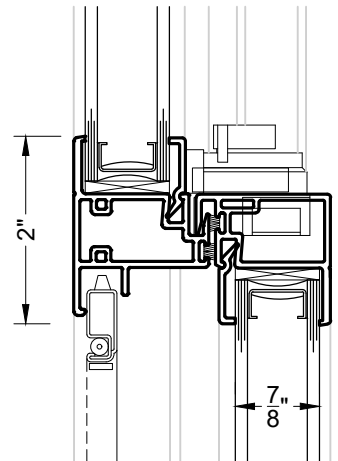


2 MEETING RAIL
SH300

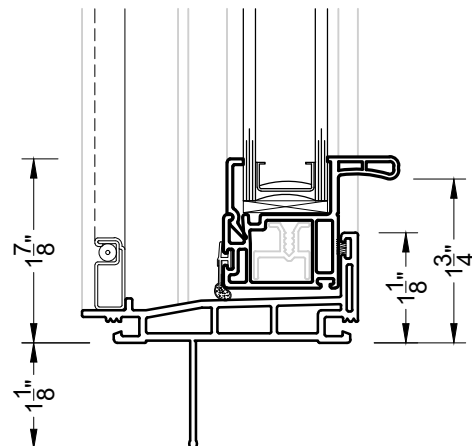


3 SILL
SH300

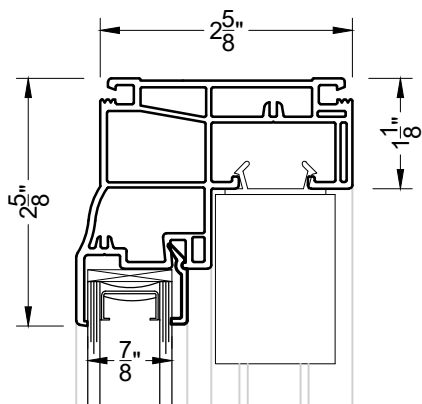


① REPLACEMENT HEAD
SH300

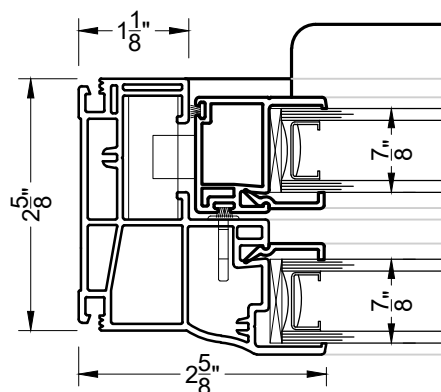


③ REPLACEMENT JAMB
SH300

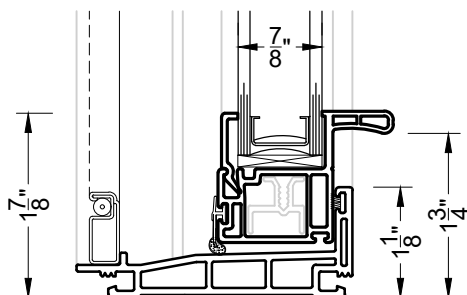


② REPLACEMENT SILL
SH300

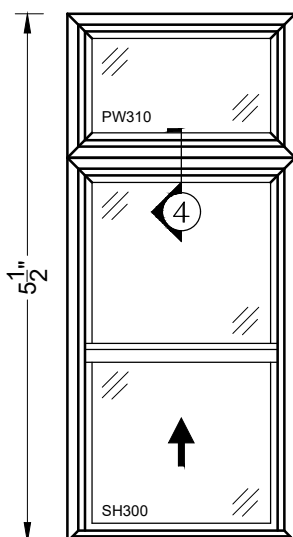



DH300 & PW310

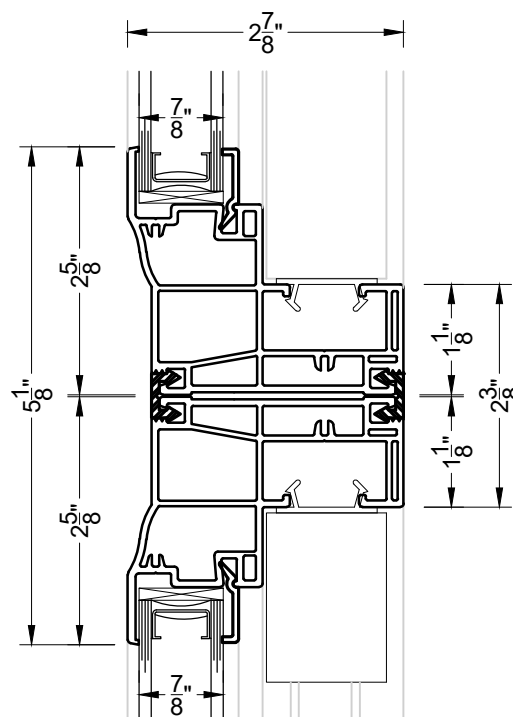

④ 0 DEGREE MULLION
PW310 OVER SH300

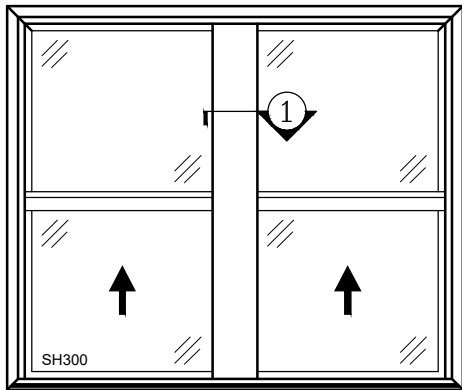

TWIN SH300

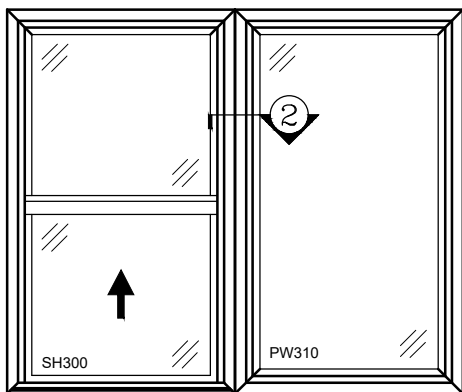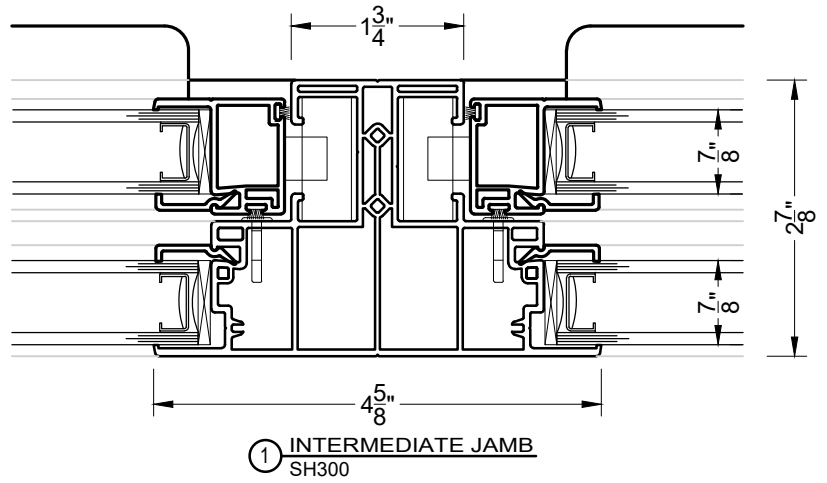

DH300 & PW310

